

# EG-(SERIES)M60-HD MONOCRYSTALLINE 120-CELL MODULE 325 ~ 345Wp

0-+3% POSITIVE TOLERANCE



## KEY FEATURES



### Mbb half cell design

Half-cut cells brings lower resistance and increased Multi Busbar reflectance ensures higher power output



### High Efficiency

Leading PERC technology achieves higher module efficiency up to 20.44%



### Excellent Low-light Performance

Advanced solar cell surface texturing technology allows for excellent performance in low-light environments



### High Reliability

Strict in-house testing in PV Lab which is CNAS approved & VDE certified



### Highly Strengthened Design

Certified to withstand: 5400Pa snow load and 2400Pa wind load



### PID Resistant

Excellent PID resistance performance optimized by unique structural design



- \* Black Frames Applied
- \* 5BB/9BB Cells Applied




· ISO9001:2015, ISO14001:2015, ISO45001:2018  
QC080000:2017, IEC TS 62941  
certified factory

· IEC61215, IEC61730, UL1703, IEC62804, IEC62716  
certified product


## LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty - 25 Year Linear Power Warranty

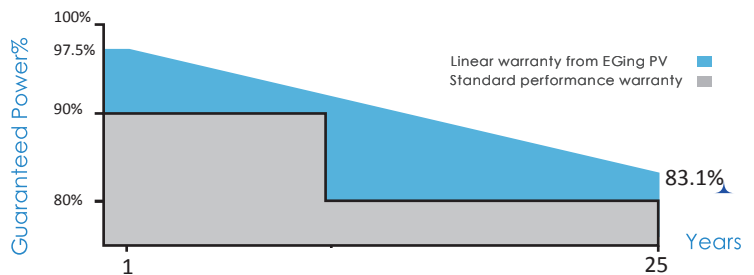

As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGing PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

## Engineering Drawings

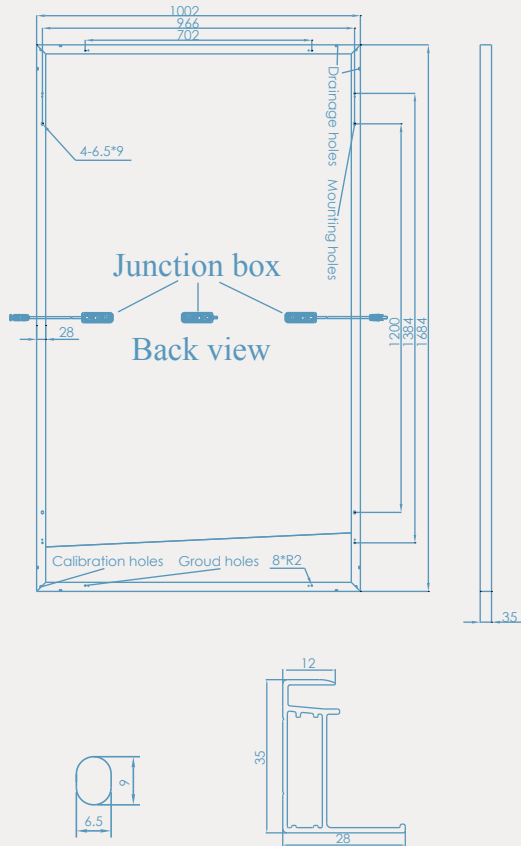

## Electrical Characteristics


STC	EG-325 M60-HD	EG-330 M60-HD	EG-335 M60-HD	EG-340 M60-HD	EG-345 M60-HD
Pmax (W)	325	330	335	340	345
Vmp (V)	33.20	33.41	33.61	33.80	34.00
Imp (A)	9.79	9.88	9.97	10.06	10.15
Voc (V)	40.74	40.94	41.14	41.35	41.54
Isc (A)	10.26	10.35	10.44	10.53	10.63
Module efficiency (%)	19.26	19.55	19.85	20.14	20.44
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	20				
Power tolerance (%)	0~+3				
Temperature coefficient	Pmax (%/°C)	-0.390			
	Isc (%/°C)	0.039			
	Voc (%/°C)	-0.295			

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

NOCT	EG-325 M60-HD	EG-330 M60-HD	EG-335 M60-HD	EG-340 M60-HD	EG-345 M60-HD
Pmax (W)	241	245	248	252	255
Vmp (V)	30.55	30.78	30.97	31.30	31.45
Imp (A)	7.89	7.96	8.01	8.05	8.11
Voc (V)	37.49	37.72	37.91	38.30	38.42
Isc (A)	8.27	8.34	8.39	8.44	8.50
Power tolerance (%)	0~+3				

NOCT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

## I - V Curves

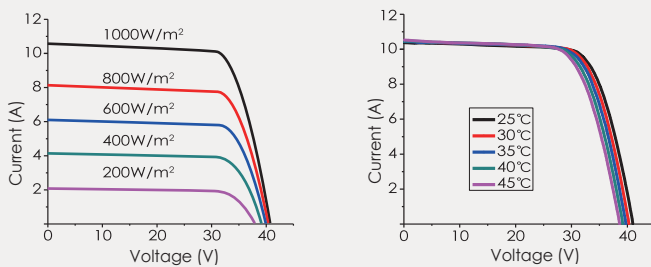

## Packing Configuration

Pieces per pallet	30
Size of packing (mm)	1720*1120*1150
Weight of packing (kg)	594
Pieces per container	780
Size of container	40' HC

## Mechanical Characteristics

Number of cells (pcs)	120
Size of cell (mm)	158.75*79.375
Type of cell	Mono
Thickness of glass(mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1684*1002*35
Weight (kg)	18.3
Cables/connectors	4mm <sup>2</sup> MC4 compatible
Length of Cabel(mm)	1000

## Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice - ball with velocity of 23m/s

Revised in July, 2020

CAUTION: All rights reserved by EGING PV.  
Specifications included in this datasheet are subject to change without notice.